





magnetic ultra slim 04



Magnetic Track Lights LED



VK/04460/DW/6

VK/04460/.../6


Product Models

Code	Model	Color	Kelvin	Watt	Lumen	Energy class	Degrees	CRI	Box
71164-134721	VK/04460/B/DW/6	■ Black	2700K-6000K	5W	208lm	6	120°	CRI>90	50pcs
71164-135721	VK/04460/W/DW/6	□ White	2700K-6000K	5W	208lm	6	120°	CRI>90	50pcs

Details
Input Voltage 40V. Input current 0.133A. Output Voltage 18.8V. Output current 300mA. Watt 5W. CRI>90. Type of Led San'an. Numbers of Led 12. Angle 120°. Dimmable. Lifetime 8000 hrs. Working temperature < 70°C. Material Aluminium. Installation Track. 3 years guarantee. Bluetooth, Zigbee.


IP20. 5W.

operation only with

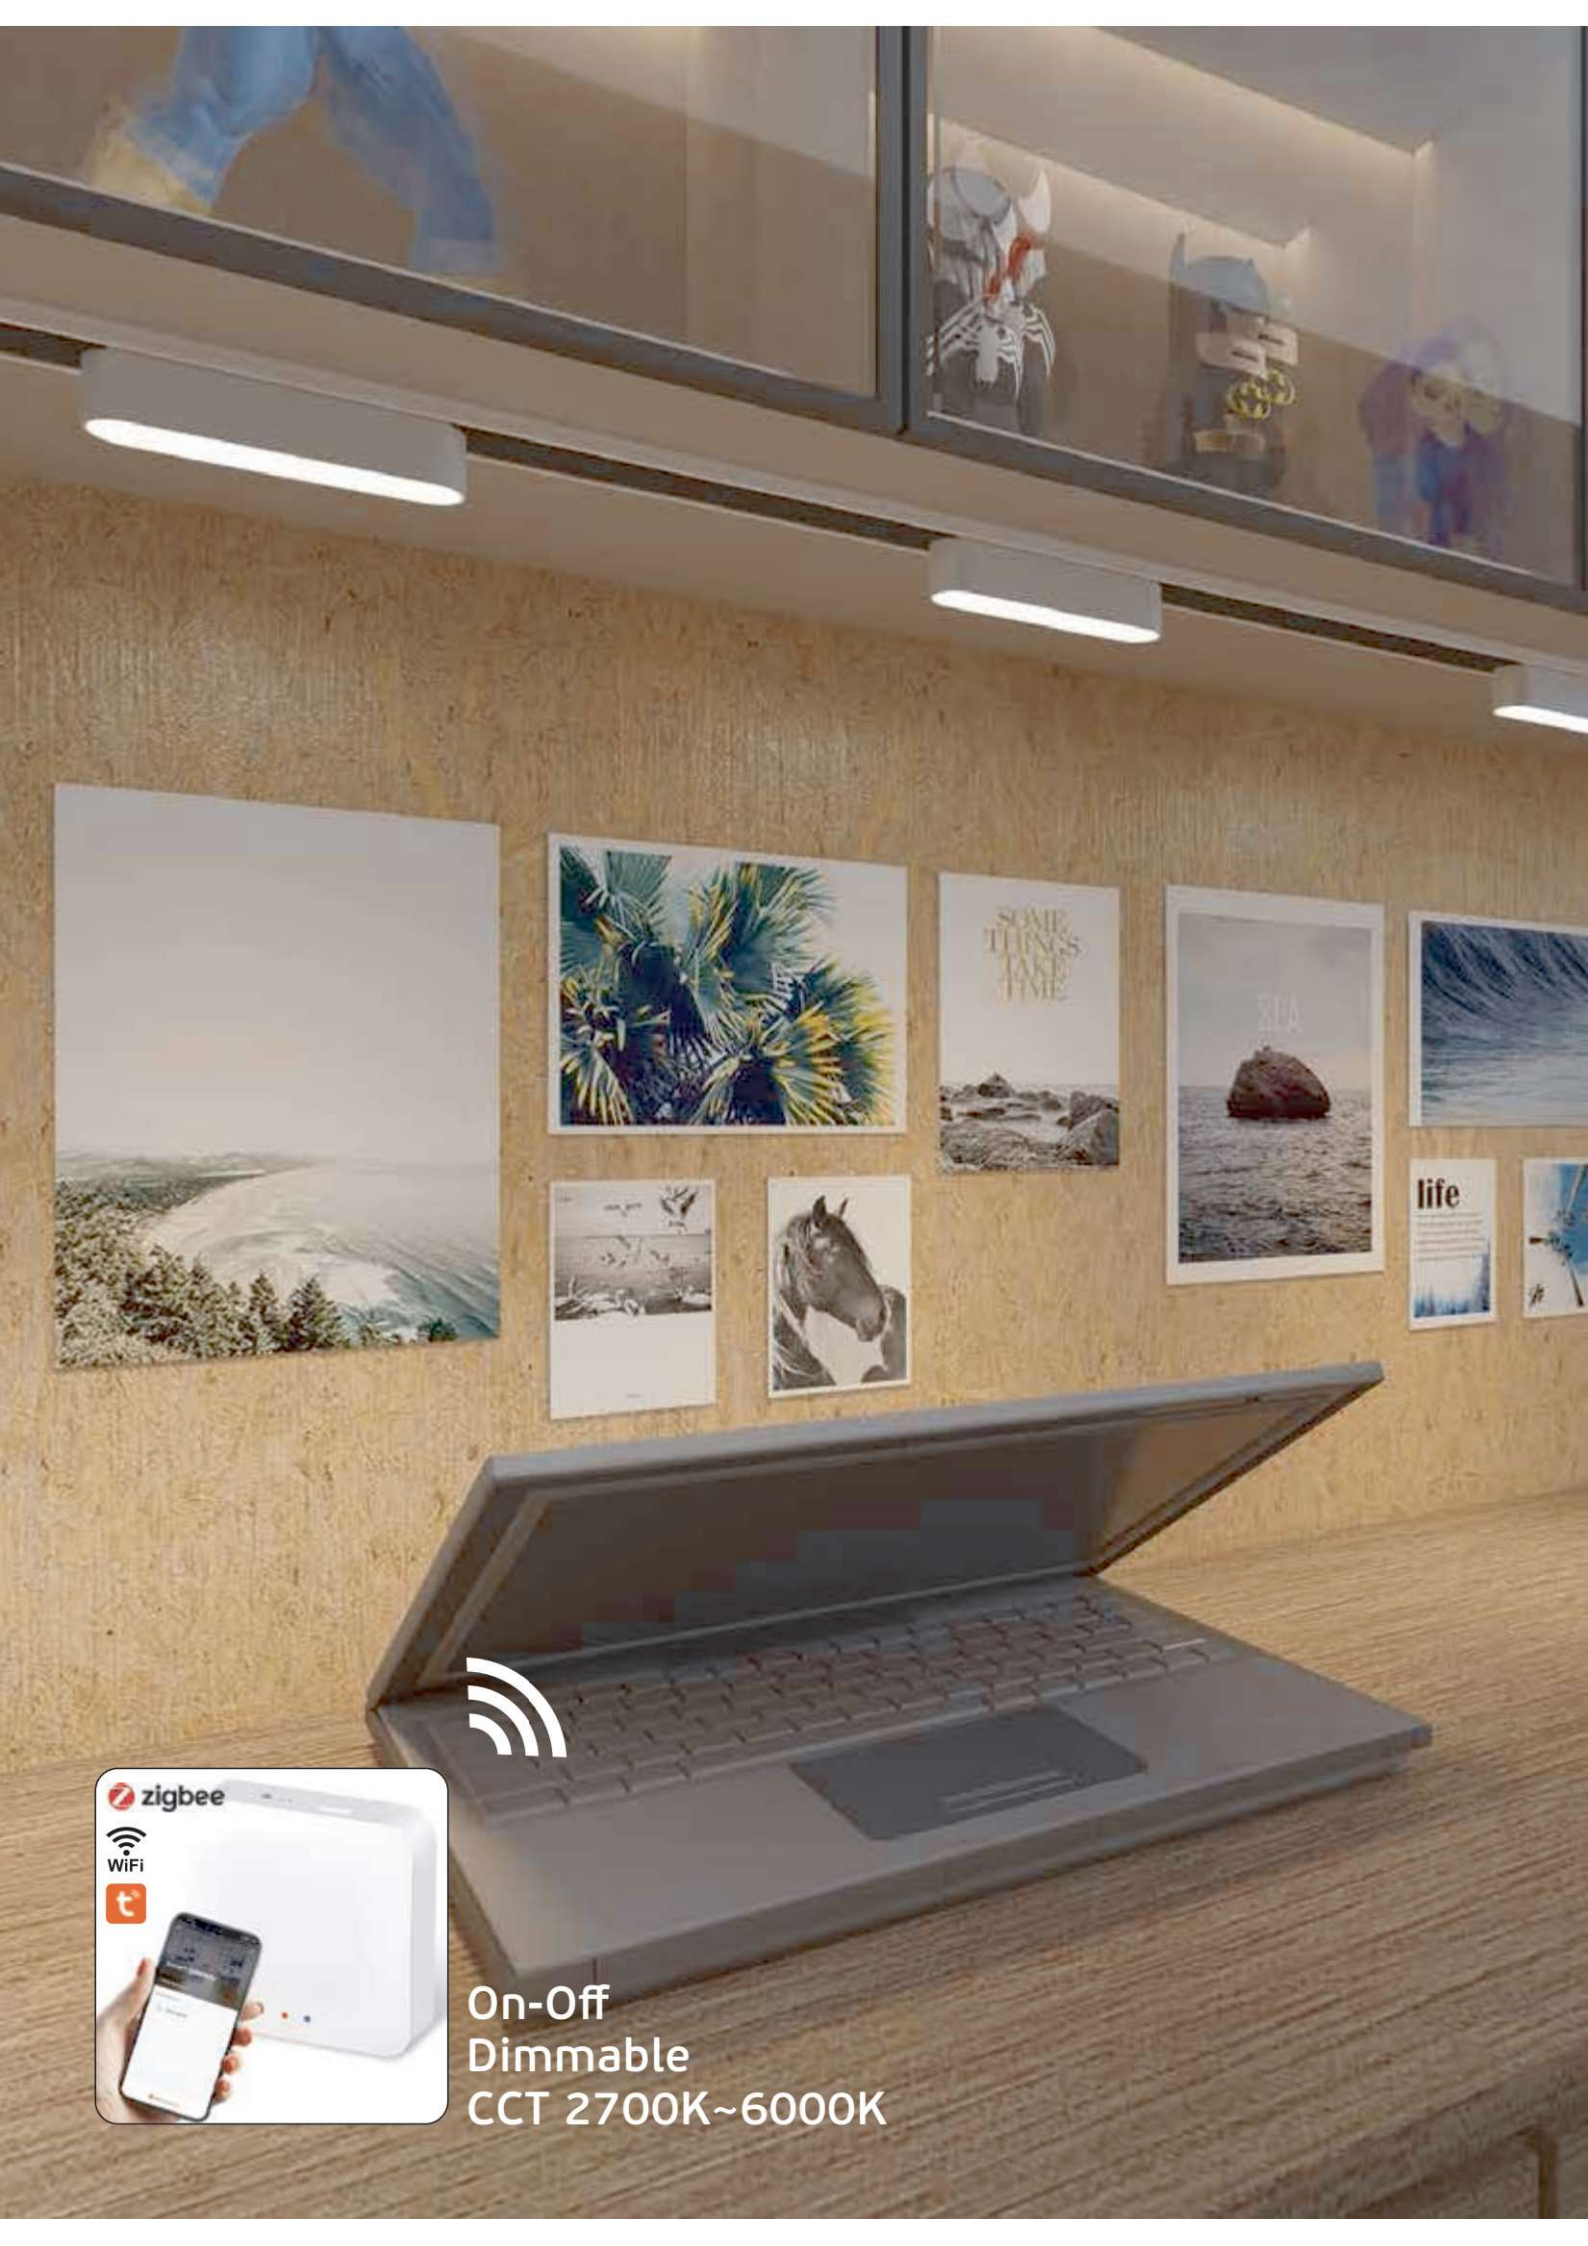

On-Off
Dimmable
CCT 2700K~6000K

Magnetic Track Lights LED



VK/04467/DW/6

VK/04467/.../6		Product Models							
Code	Model	Color	Kelvin	Watt	Lumen	Energy class	Degrees	CRI	Box
71164-136721	VK/04467/B/DW/6	■ Black	2700K-6000K	5W	376lm	6	36°	CRI>90	50pcs
71164-137721	VK/04467/W/DW/6	□ White	2700K-6000K	5W	376lm	6	36°	CRI>90	50pcs

Details
Input Voltage 40V. Input current 0.128A. Output Voltage 18.8V. Output current 300mA. Watt 5W. CRI>90. Type of Led San'an. Numbers of Led 6. Angle 36°. Dimmable. Lifetime 8000 hrs. Working temperature < 70°C. Material Aluminum. Installation Track. 3 years guarantee. Bluetooth, Zigbee.



IP20. 5W.

operation only with








On-Off
Dimmable
CCT 2700K~6000K

Magnetic Track Lights LED



VK/04468/DW/6

VK/04468/.../6		Product Models							
Code	Model	Color	Kelvin	Watt	Lumen	Energy class	Degrees	CRI	Box
71164-138721	VK/04468/B/DW/6	■ Black	2700K-6000K	5W	143lm	6	60°	CRI>90	50pcs
71164-139721	VK/04468/W/DW/6	□ White	2700K-6000K	5W	143lm	6	60°	CRI>90	50pcs

Details
Input Voltage 40V. Input current 0.133A. Output Voltage 189V. Output current 300mA. Watt 5W. CRI>90. Type of Led San'an. Numbers of Led 12. Angle 60°. Dimmable. Lifetime 8000 hrs. Working temperature < 70°C. Material Aluminum. Installation Track. 3 years guarantee. Bluetooth, Zigbee.

**IP20. 5W.**

operation only with



**zigbee**





On-Off
Dimmable
CCT 2700K~6000K

Magnetic Track Lights LED

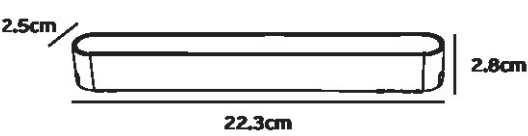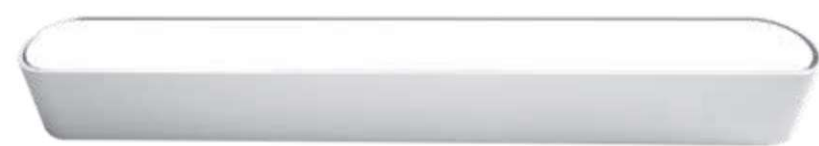

VK/04460/DW/12

VK/04460/.../12

Product Models

Code	Model	Color	Kelvin	Watt	Lumen	Energy class	Degrees	CRI	Box
71164-140721	VK/04460/B/DW/12	■ Black	2700K-6000K	8W	614lm	F	120°	CRI>90	50pcs
71164-141721	VK/04460/W/DW/12	□ White	2700K-6000K	8W	614lm	F	120°	CRI>90	50pcs

Details

Input Voltage 40V. Input current 0.26A. Output Voltage 37.8V. Output current 300mA. Watt 8W. CRI>90. Type of Led San'an. Numbers of Led 24. Angle 120°. Dimmable. Lifetime 8000 hrs. Working temperature < 70°C. Material Aluminium. Installation Track. 3 years guarantee. Bluetooth, Zigbee.




IP20. 8W.

operation only with


 zigbee 



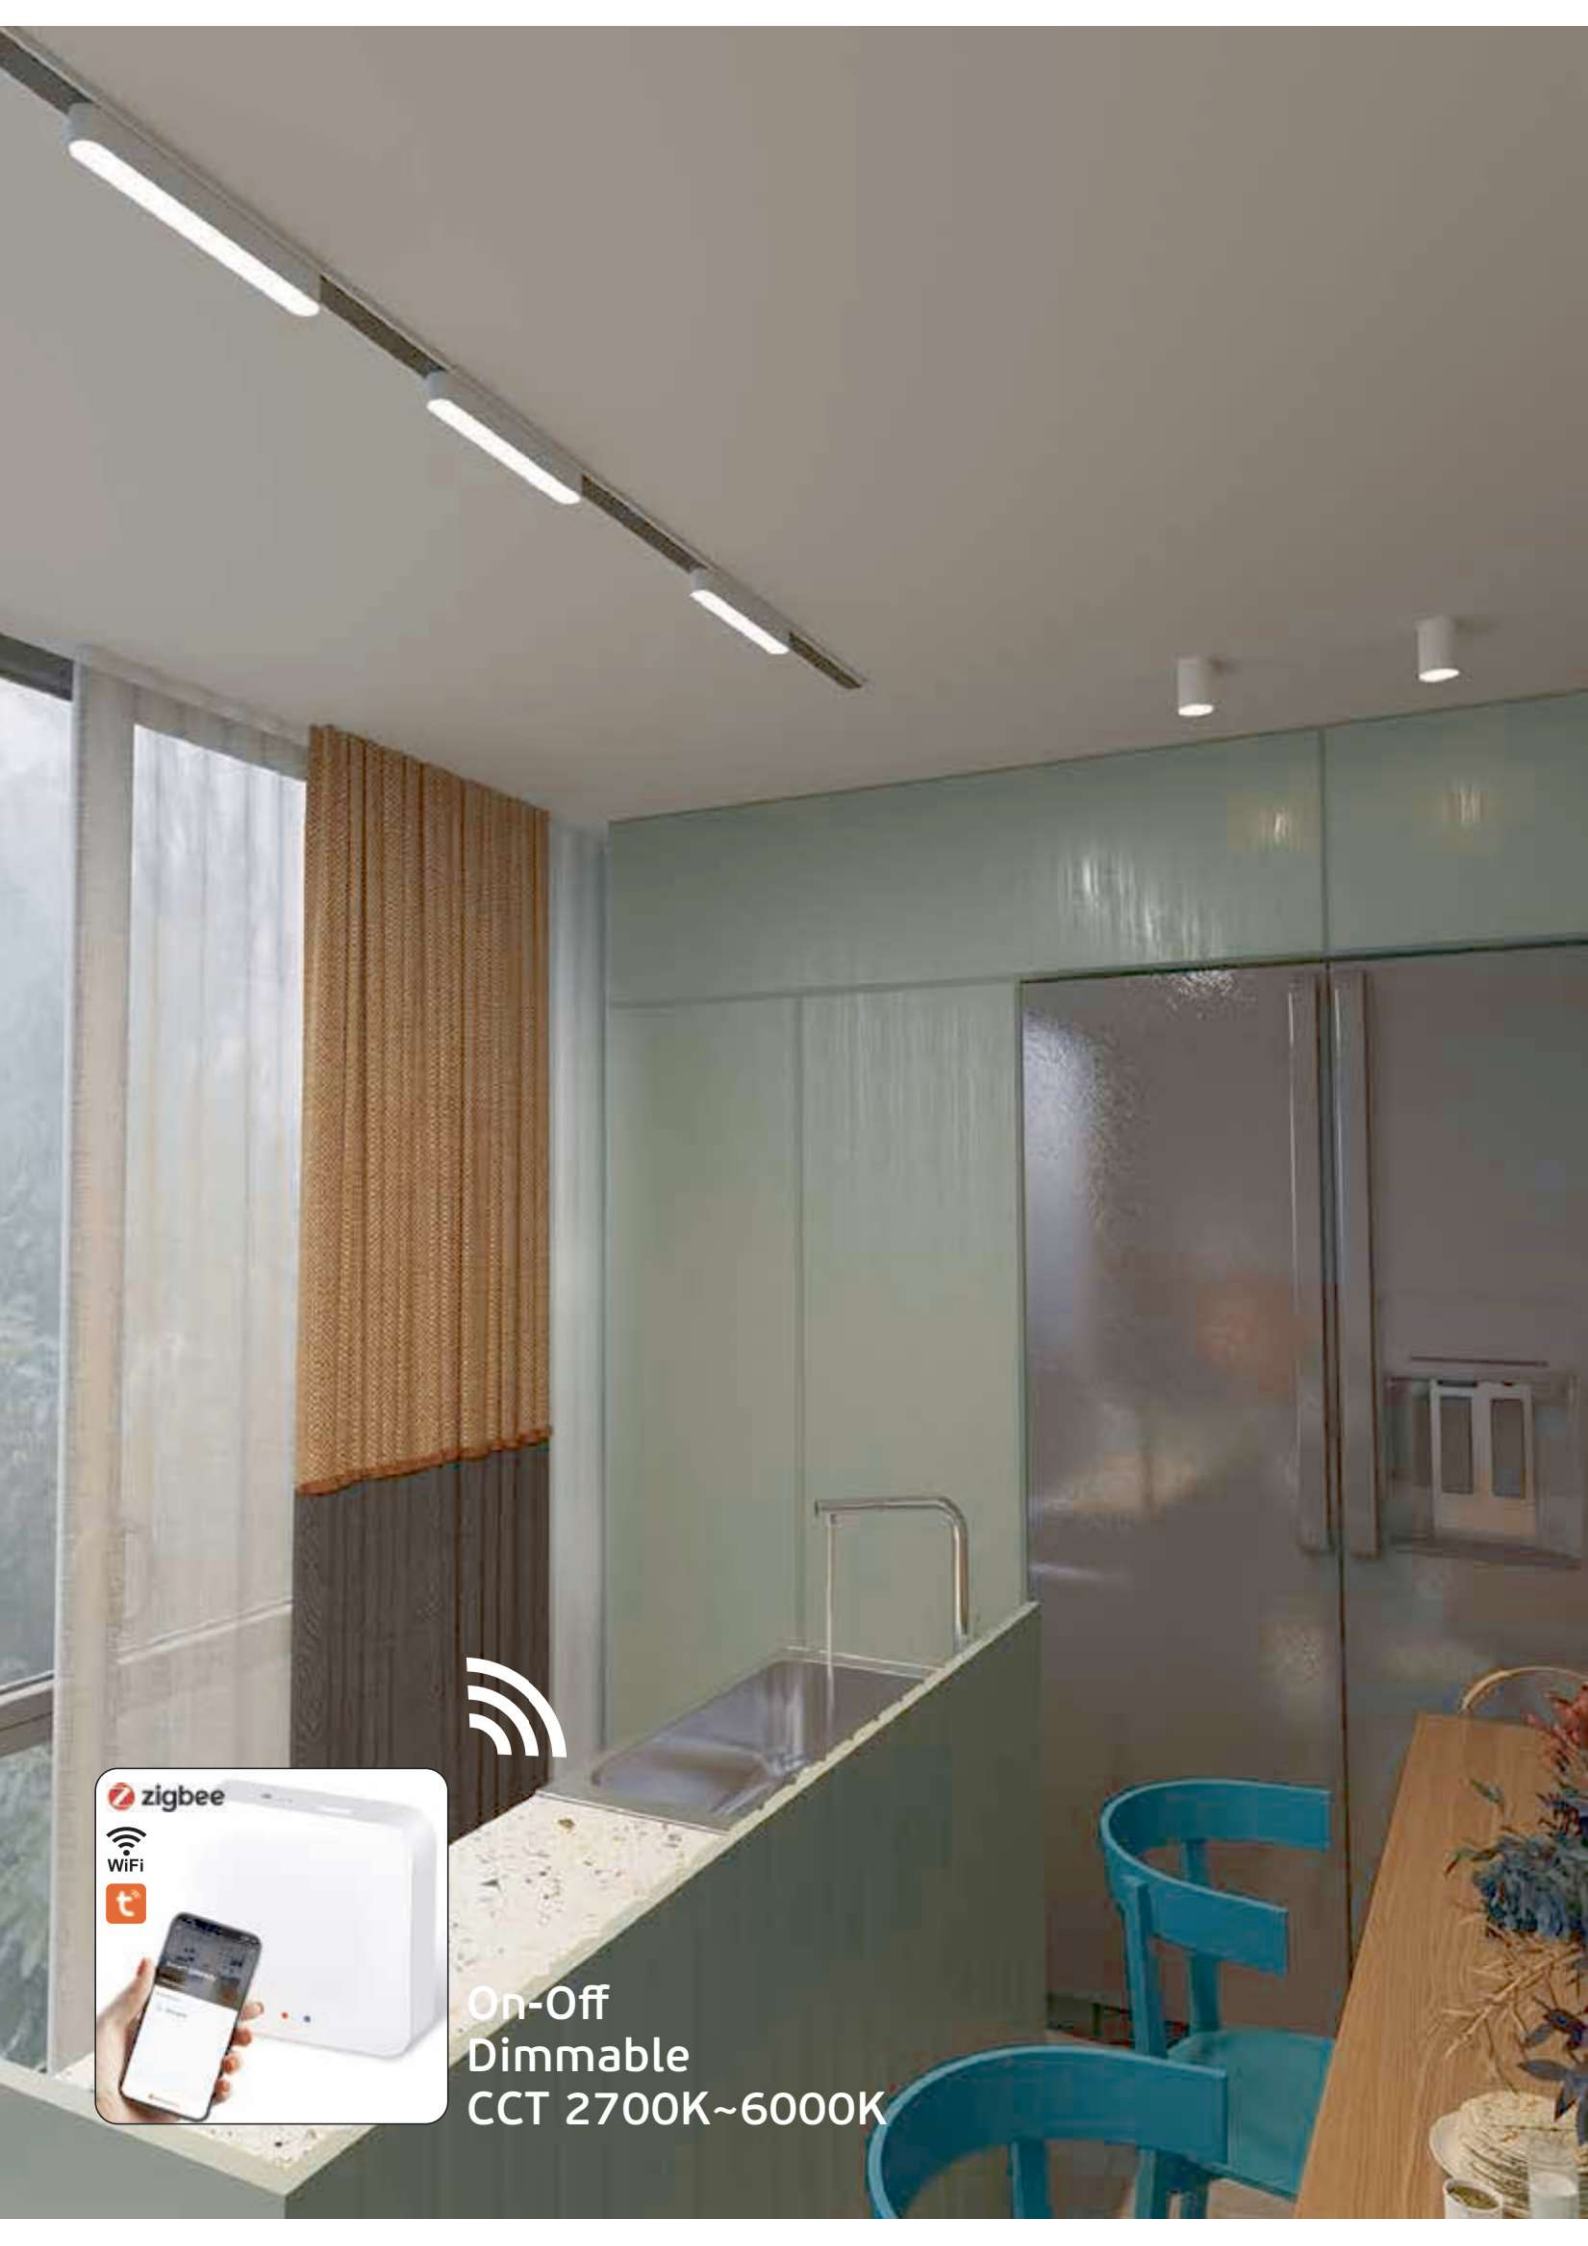

On-Off
Dimmable
CCT 2700K~6000K

Magnetic Track Lights LED



VK/04467/DW/12

VK/04467/.../12

Product Models

Code	Model	Color	Kelvin	Watt	Lumen	Energy class	Degrees	CRI	Box
71164-142721	VK/04467/B/DW/12	■ Black	2700K-6000K	8W	626lm	F	36°	CRI>90	50pcs
71164-143721	VK/04467/W/DW/12	□ White	2700K-6000K	8W	626lm	F	36°	CRI>90	50pcs

Details
Input Voltage 40V. Input current 0.242A. Output Voltage 35.6V. Output current 300mA. Watt 8W. CRI>90. Type of Led San'an. Numbers of Led 12. Angle 36°. Dimmable. Lifetime 8000 hrs. Working temperature < 70°C. Material Aluminum. Installation Track. 3 years guarantee. Bluetooth, Zigbee.

90

IP20. 8W.

operation only with

WIFI

Android

iOS

zigbee


t

Funded by the European Union



On-Off
Dimmable
CCT 2700K~6000K

Magnetic Track Lights LED



VK/04468/DW/12

VK/04468/.../12		Product Models							
Code	Model	Color	Kelvin	Watt	Lumen	Energy class	Degrees	CRI	Box
71164-144721	VK/04468/B/DW/12	■ Black	2700K-6000K	8W	342lm	6	60°	CRI>90	50pcs
71164-145721	VK/04468/W/DW/12	□ White	2700K-6000K	8W	342lm	6	60°	CRI>90	50pcs


Details
Input Voltage 40V. Input current 0.26A. Output Voltage 37.6V. Output current 300mA. Watt 8W. CRI>90. Type of Led San'an. Numbers of Led 24. Angle 60°. Dimmable. Lifetime 8000 hrs. Working temperature < 70°C. Material Aluminium. Installation Track. 3 years guarantee. Bluetooth, Zigbee.

**IP20. 8W.**


operation only with     




Funded by the European Union

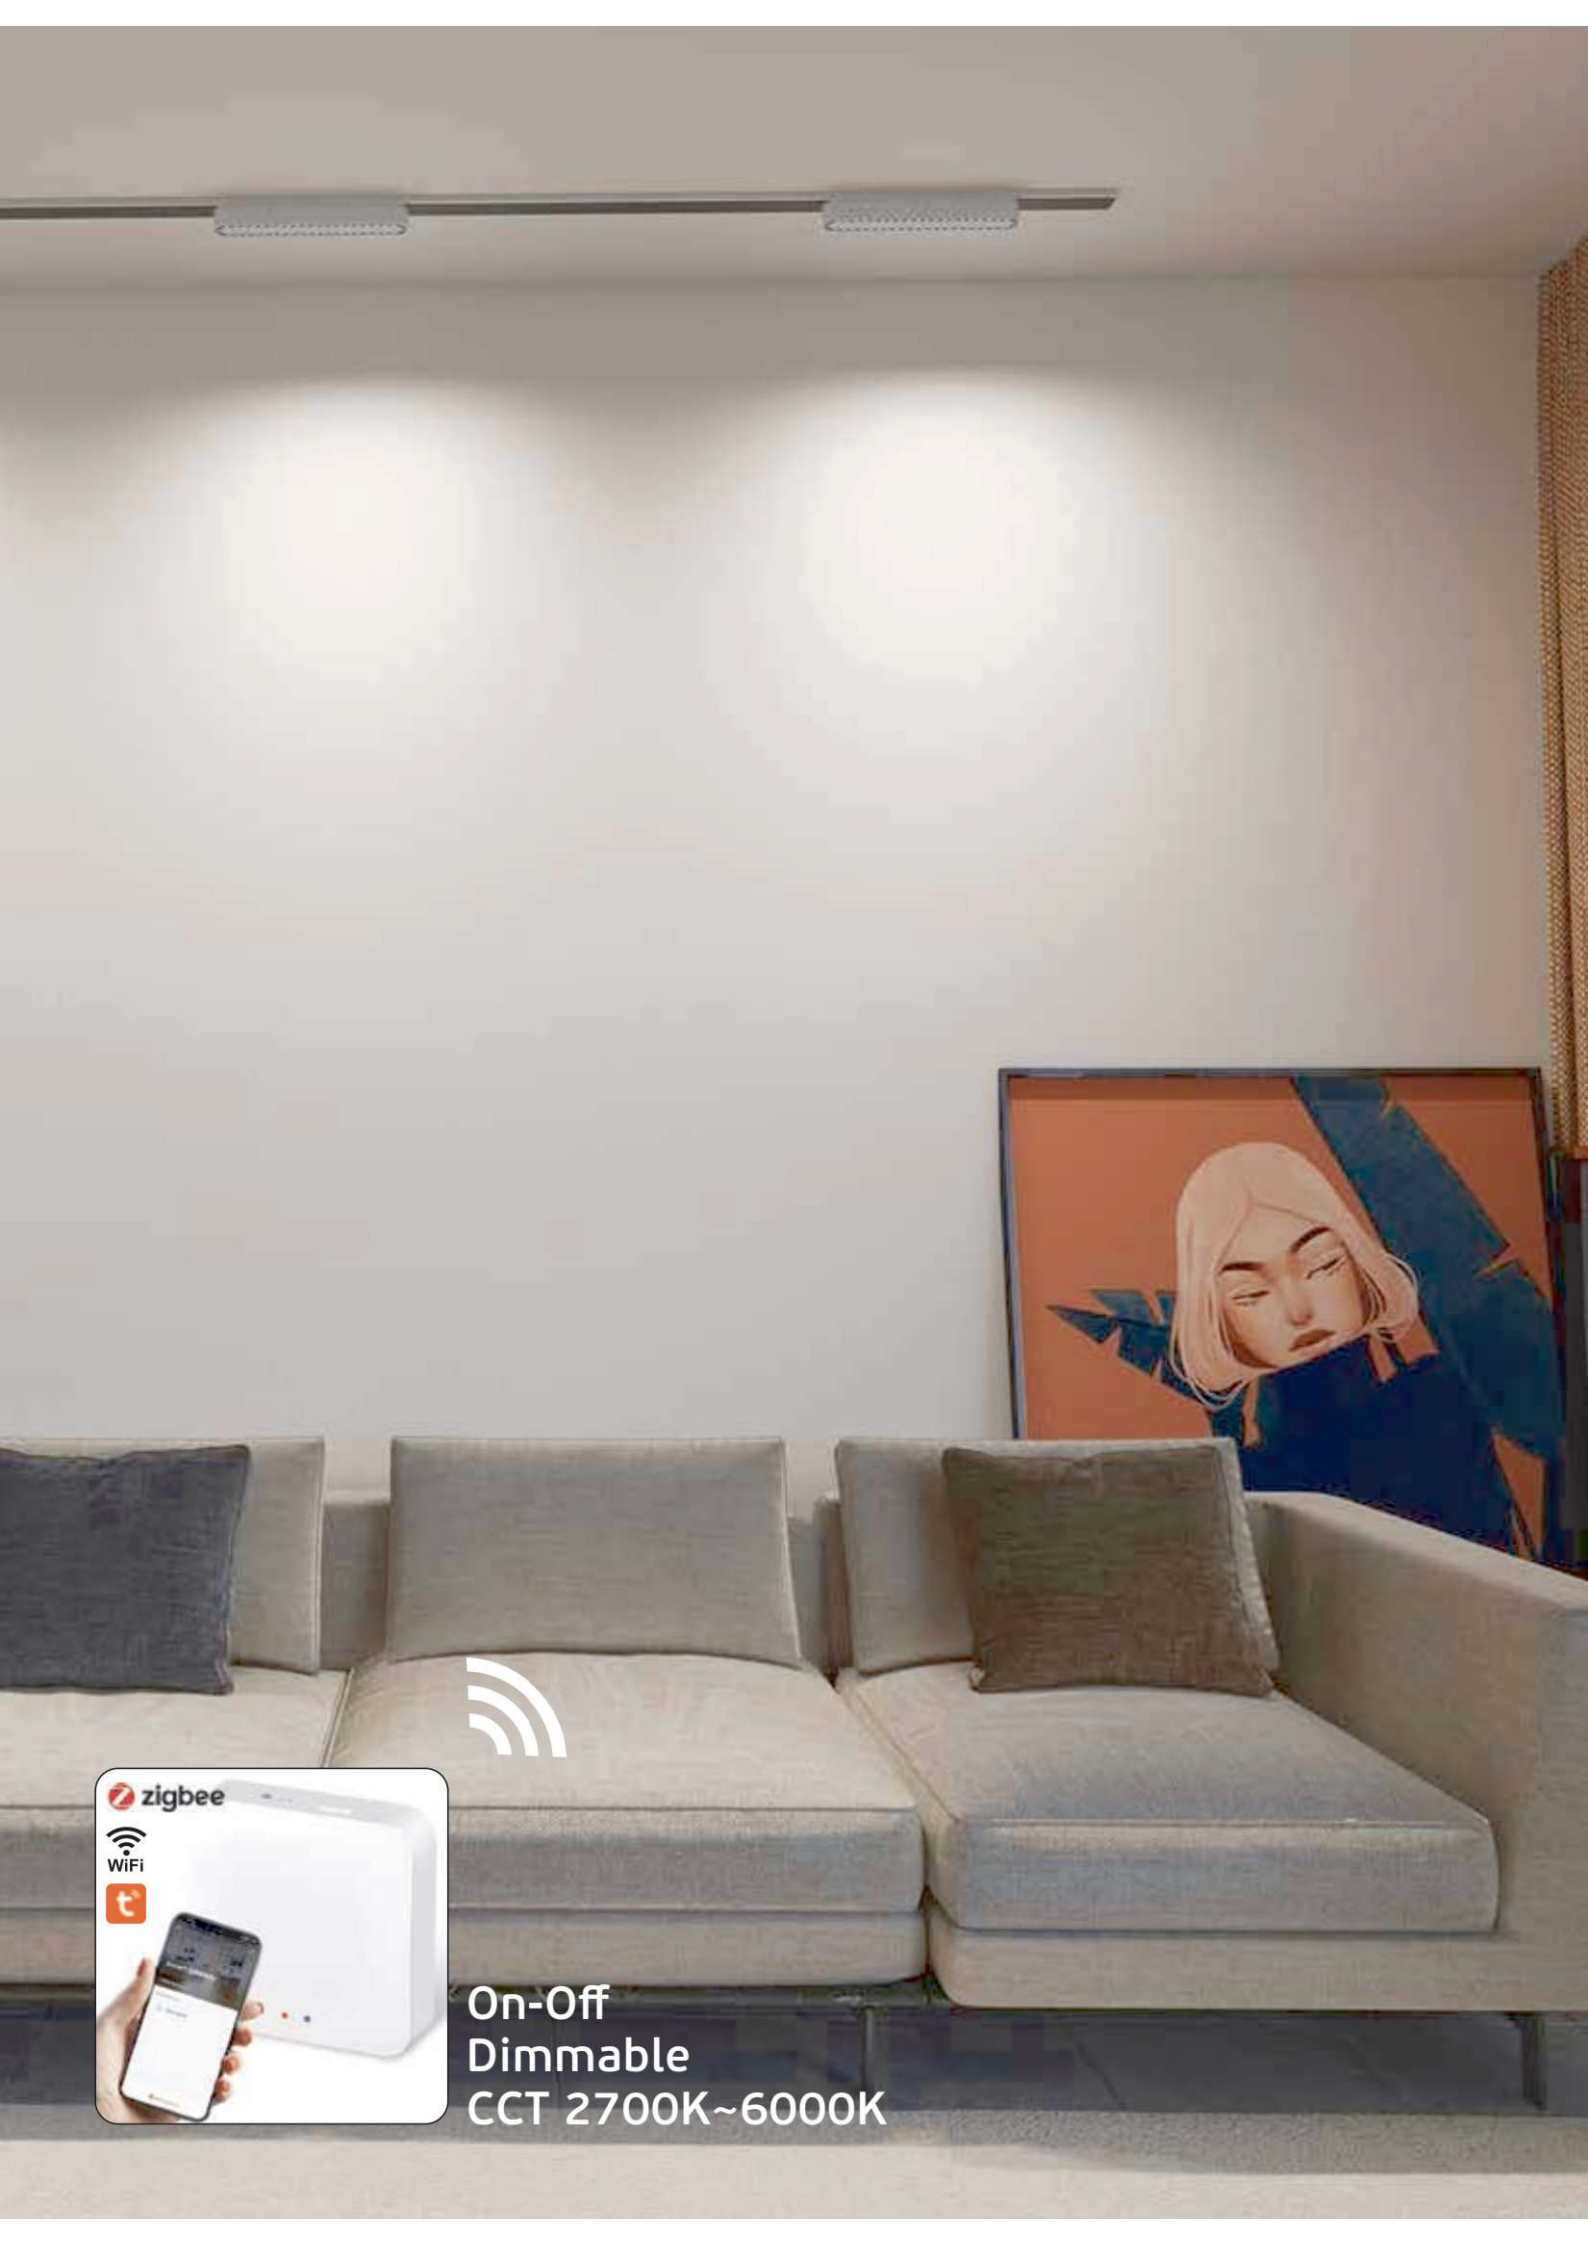


On-Off
Dimmable
CCT 2700K~6000K

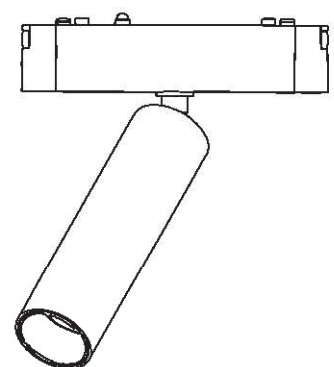


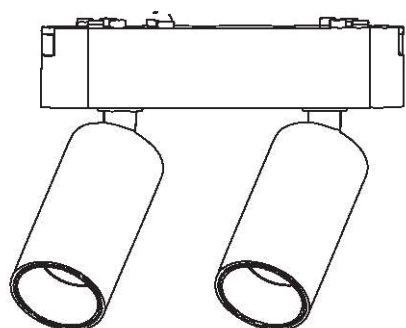

Magnetic Track Lights LED



VK/04469/TR/DW/S




VK/04469/TR/DW/S/2

VK/04469/.../S


Product Models

Code	Model	Color	Kelvin	Watt	Lumen	Energy class	Degrees	CRI	Box
71164-146721	VK/04469/TR/B/DW/S	■ Black	2700K-6000K	4W	234lm	6	24°	CRI>90	30pcs
71164-147721	VK/04469/TR/W/DW/S	□ White	2700K-6000K	4W	234lm	6	24°	CRI>90	30pcs
71164-148721	VK/04469/TR/B/DW/S/2	■ Black	2700K-6000K	2x4W	518lm	6	24°	CRI>90	30pcs
71164-149721	VK/04469/TR/W/DW/S/2	□ White	2700K-6000K	2x4W	518lm	6	24°	CRI>90	30pcs

Details
Input Voltage 40V. Input current 0.107/0.2A. Output Voltage 33.8/33.4V. Output current 130/250mA. Watt 4W. 2x4W. CRI>90. Type of Led *bridgetlux*. Numbers of Led 1/2. Angle 24°. Rotation Angle 360° Dimmable. Lifetime 8000 hrs. Working temperature < 70°C. Material Aluminium. Installation Track. 3 years guarantee. Bluetooth, Zigbee.



VK/04469/TR/DW/L



VK/04469/TR/DW/L/2

VK/04469/.../L

Product Models

Code	Model	Color	Kelvin	Watt	Lumen	Energy class	Degrees	CRI	Box
71164-150721	VK/04469/TR/B/DW/L	■ Black	2700K-6000K	6W	383lm	6	24°	CRI>90	30pcs
71164-151721	VK/04469/TR/W/DW/L	□ White	2700K-6000K	6W	383lm	6	24°	CRI>90	30pcs
71164-152721	VK/04469/TR/B/DW/L/2	■ Black	2700K-6000K	2x6W	705lm	6	24°	CRI>90	30pcs
71164-153721	VK/04469/TR/W/DW/L/2	□ White	2700K-6000K	2x6W	705lm	6	24°	CRI>90	30pcs

Details

Input Voltage 40V. Input current 0.135/0.293A. Output Voltage 34.8/34.5V. Output current 170/350mA. Watt 6W. 2x6W. CRI>90. Type of Led [bridgelux](#). Numbers of Led 1/2. Angle 24°. Rotation Angle 360° Dimmable. Lifetime 8000 hrs. Working temperature < 70°C. Material Aluminium. Installation Track. 3 years guarantee. Bluetooth, Zigbee.




IP20. 6W. 2x6W.

operation
only with


zigbee



Magnetic Track Lights LED



VK/04470/TR/DW/S



VK/04470/TR/DW/L

VK/04470

Product Models

Code	Model	Color	Kelvin	Watt	Lumen	Energy class	Degrees	CRI	Box
71164-154721	VK/04470/TR/B/DW/S	■ Black	2700K-6000K	8W	507lm	6	24°	CRI>90	30pcs
71164-172721	VK/04470/TR/W/DW/S	□ White	2700K-6000K	8W	507lm	6	24°	CRI>90	30pcs
71164-155721	VK/04470/TR/B/DW/L	■ Black	2700K-6000K	11W	685lm	6	24°	CRI>90	30pcs
71164-173721	VK/04470/TR/W/DW/L	□ White	2700K-6000K	11W	685lm	6	24°	CRI>90	30pcs

Details


Input Voltage 40V. Input current 0.239/0.322A. Output Voltage 37/36.1V. Output current 300/400mA. Watt 8W. 11W. CRI>90. Type of Led [bridgelux](#). Numbers of Led 1. Angle 24°. Rotation Angle 360° Dimmable. Lifetime 8000 hrs. Working temperature < 70°C. Material Aluminium. Installation Track. 3 years guarantee. Bluetooth, Zigbee.



IP20. 8W. 11W.

operation
only with



**VK/04471/TR/DW****VK/04471****Product Models**


Code	Model	Color	Kelvin	Watt	Lumen	Energy class	Degrees	CRI	Box
71164-156721	VK/04471/TR/B/DW	■ Black	2700K-6000K	14W	906lm	6	24°	CRI>90	30pcs
71164-157721	VK/04471/TR/W/DW	□ White	2700K-6000K	14W	906lm	6	24°	CRI>90	30pcs

Details


Input Voltage 40V. Input current 0.237A. Output Voltage 35V. Output current 300mA. Watt 14W. CRI>90. Type of Led **bridgelux**. Numbers of Led 1. Angle 24°. Rotation Angle 360° Dimmable. Lifetime 8000 hrs. Working temperature < 70°C. Material Aluminum. Installation Track. 3 years guarantee. Bluetooth, Zigbee.

**IP20. 14W.****operation
only with**

Magnetic Track Lights LED



VK/04472/TR/DW



VK/04472/TR/DW/2

VK/04472

Product Models



Code	Model	Color	Kelvin	Watt	Lumen	Energy class	Degrees	CRI	Box
71164-158721	VK/04472/TR/B/DW	■ Black	2700K-6000K	10W	581lm	6	24°	CRI>90	30pcs
71164-159721	VK/04472/TR/W/DW	□ White	2700K-6000K	10W	581lm	6	24°	CRI>90	30pcs
71164-160721	VK/04472/TR/B/DW/2	■ Black	2700K-6000K	2x9W	1.218lm	6	24°	CRI>90	20pcs
71164-161721	VK/04472/TR/W/DW/2	□ White	2700K-6000K	2x9W	1.218lm	6	24°	CRI>90	20pcs

Details
Input Voltage 40V. Input current 0.131/0.31A. Output Voltage 35.2/35.5V. Output current 300/400mA. Watt 10W. 2x9W. CRI>90. Type of Led *bridgelux*. Numbers of Led 1, 2. Angle 24°. Rotation Angle 360° Dimmable. Lifetime 8000 hrs. Working temperature < 70°C. Material Aluminium. Installation Track. 3 years guarantee. Bluetooth, Zigbee.

IP20. 10W. 2x9W.

operation only with



**VK/04473/CE/DW****VK/04489/CE/DW**

VK/04473 VK/04489

Product Models

Code	Model	Color	Kelvin	Watt	Lumen	Energy class	Degrees	CRI	Box
71164-162721	VK/04473/CE/B/DW	■ Black	2700K-6000K	12W	753lm	6	24°	CRI>90	20pcs
71164-163721	VK/04473/CE/W/DW	□ White	2700K-6000K	12W	753lm	6	24°	CRI>90	20pcs
71164-174721	VK/04489/CE/B/DW	■ Black	2700K-6000K	12W	1.002lm	6	120°	CRI>90	20pcs
71164-175721	VK/04489/CE/W/DW	□ White	2700K-6000K	12W	1.002lm	6	120°	CRI>90	20pcs

Details

VK/04473/CE: Input Voltage 40V. Input current 0.243A. Output Voltage 37V. Output current 300mA. Watt 12W. CRI>90. Type of Led San'an. Numbers of Led 1. Angle 24°.

VK/04489/CE: Input Voltage 40V. Input current 0.191A. Output Voltage 34.5V. Output current 250mA. Watt 12W. CRI>90. Type of Led San'an. Numbers of Led 60. Angle 120°.

Rotation Angle 360° Dimmable. Lifetime 8000 hrs. Working temperature < 60°C. Material Aluminium. Installation Track. 3 years guarantee. Bluetooth, Zigbee.



IP20. 12W.


operation
only with



zigbee



Magnetic Track Lights LED

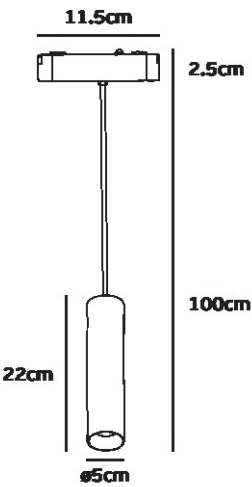

VK/04474/PE/DW

VK/04474

Product Models

Code	Model	Color	Kelvin	Watt	Lumen	Energy class	Degrees	CRI	Box
71164-166721	VK/04474/PE/B/DW	■ Black	2700K-6000K	11W	678lm	6	20°	CRI>90	20pcs
71164-167721	VK/04474/PE/W/DW	□ White	2700K-6000K	11W	678lm	6	20°	CRI>90	20pcs

Details

Input Voltage 40V. Input current 0.207A. Output Voltage 36.7V. Output current 250mA. Watt 11W. CRI>90. Type of Led [bridgelux](#). Numbers of Led 1. Angle 20°. Rotation Angle 360° Dimmable. Lifetime 8000 hrs. Working temperature < 70°C. Material Aluminium. Installation Track. 3 years guarantee. Bluetooth, Zigbee.



IP20. 11W.

operation only with







On-Off
Dimmable
CCT 2700K~6000K



Magnetic Track Lights BASES




Base for magnetics lights




+



=

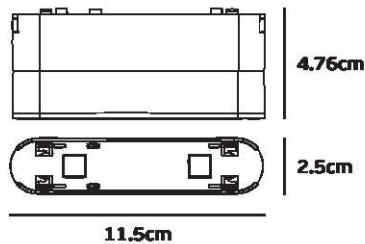

VK/04475/BASE



VK/04475

Product Models

Code	Model	Color	Box
71164-168721	VK/04475/B/BASE	■ Black	50pcs
71164-169721	VK/04475/W/BASE	□ White	50pcs

Details
Input Voltage DC40-48V. Rotation Angle 0-90°. Material Aluminium. Installation Track.





On-Off
Dimmable
CCT 2700K~6000K




Base for magnetics lights


+



=

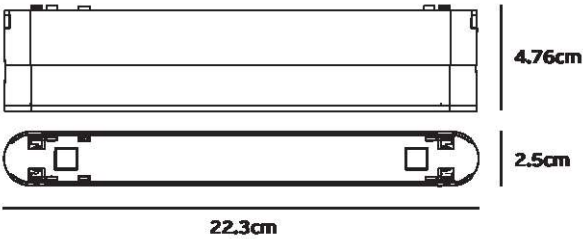

VK/04476/BASE



VK/04476

Product Models

Code	Model	Color	Box
71164-170721	VK/04476/B/BASE	■ Black	50pcs
71164-171721	VK/04476/W/BASE	□ White	50pcs

Details
Input Voltage DC40-48V. Rotation Angle 0-90°. Material Aluminium. Installation Track.






On-Off
Dimmable
CCT 2700K~6000K

ultra slim

2.5x0.55cm



100cm, 150cm, 200cm



VK/04478



Product Models

Code	Model	Color	Voltage	Length	Thickness	Box
71164-031115	VK/04478/1/B	■ Black	40V	100cm	0.55cm	40pcs
71164-032115	VK/04478/1/W	□ White	40V	100cm	0.55cm	40pcs
71164-033115	VK/04478/1.5/B	■ Black	40V	150cm	0.55cm	40pcs
71164-034115	VK/04478/1.5/W	□ White	40V	150cm	0.55cm	40pcs
71164-009115	VK/04478/2/B	■ Black	40V	200cm	0.55cm	40pcs
71164-010115	VK/04478/2/W	□ White	40V	200cm	0.55cm	40pcs

Details

Magnetic surface mounted track line 40V. Length 1m, 1.5m, 2m thickness 0.55cm. IP Rating IP20. Working temperature <45°C. Material Aluminium.



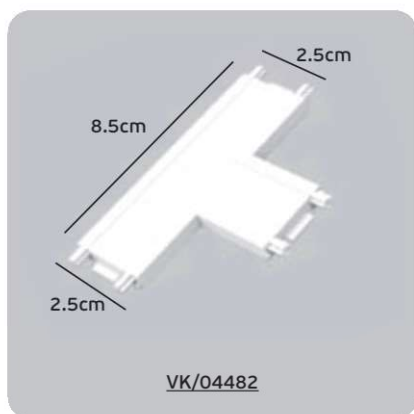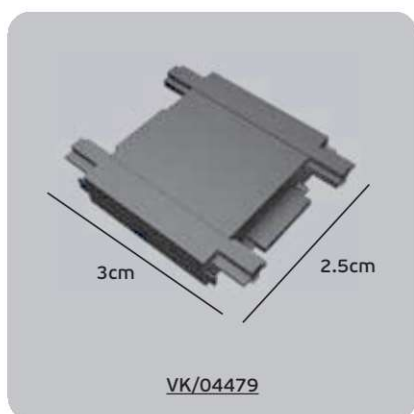

VK/04479-VK/04484

Product Models

Code	Model	Color	Voltage	Dimensions	Thickness	Box
71164-011115	VK/04479/B/CON	■ Black	40V	3x2.5cm	0.55cm	50pcs
71164-012115	VK/04479/W/CON	□ White	40V	3x2.5cm	0.55cm	50pcs
71164-013115	VK/04480/B/CON	■ Black	40V	5.5x5.5cm	0.55cm	50pcs
71164-014115	VK/04480/W/CON	□ White	40V	5.5x5.5cm	0.55cm	50pcs
71164-015115	VK/04481/B/CON	■ Black	40V	5x5cm	0.55cm	50pcs
71164-016115	VK/04481/W/CON	□ White	40V	5x5cm	0.55cm	50pcs
71164-017115	VK/04482/B/CON	■ Black	40V	8.5x2.5cm	0.55cm	50pcs
71164-018115	VK/04482/W/CON	□ White	40V	8.5x2.5cm	0.55cm	50pcs
71164-019115	VK/04483/B/CON	■ Black	40V	11x2.5cm	0.55cm	50pcs
71164-020115	VK/04483/W/CON	□ White	40V	11x2.5cm	0.55cm	50pcs
71164-021115	VK/04484/B/CON	■ Black	40V	5.5x5.5cm	0.55cm	50pcs
71164-022115	VK/04484/W/CON	□ White	40V	5.5x5.5cm	0.55cm	50pcs

Details

Connectors for Magnetic surface mounted track line 40V, IP Rating IP20, Working temperature <45°C, Material Aluminium.

Magnetic Track Lights LED

VK/04490
Zigbee wireless gateway

Product Models

Code	Model	Color	Power Input	Dimensions	Box
71164-176721	VK/04490/B/ZB	■ Black	DC 5V 1A	6.1x6.1x1.5cm	1pc
71164-177721	VK/04490/W/ZB	□ White	DC 5V 1A	6.1x6.1x1.5cm	1pc

Details
Connection method Zigbee wireless gateway. Power input DC 5V 1A. Operating temperature -20°C~45°C. Working humidity 10%-90%RH (No condensation). Application "Tuya Smart".

operation only with





Product description

Status Indicator

Distribution network indicator

Power socket

Reset button

Status Indicator

Distribution network indicator

Power socket

Reset button

Preparation for use

1. Connect your phone to Wi-fi.




Ensure that the product is within the effective coverage of the Wifi network to ensure an effective connection between the product and the smart host (gateway) Zigbee network.

*The gateway is in the network distribution mode (the indicator lights are on at the same time)

2. Download and open the App. Search for "Tuya Smart" in the application store or scan the QR code on the outer packaging /instructions to download and install the App.



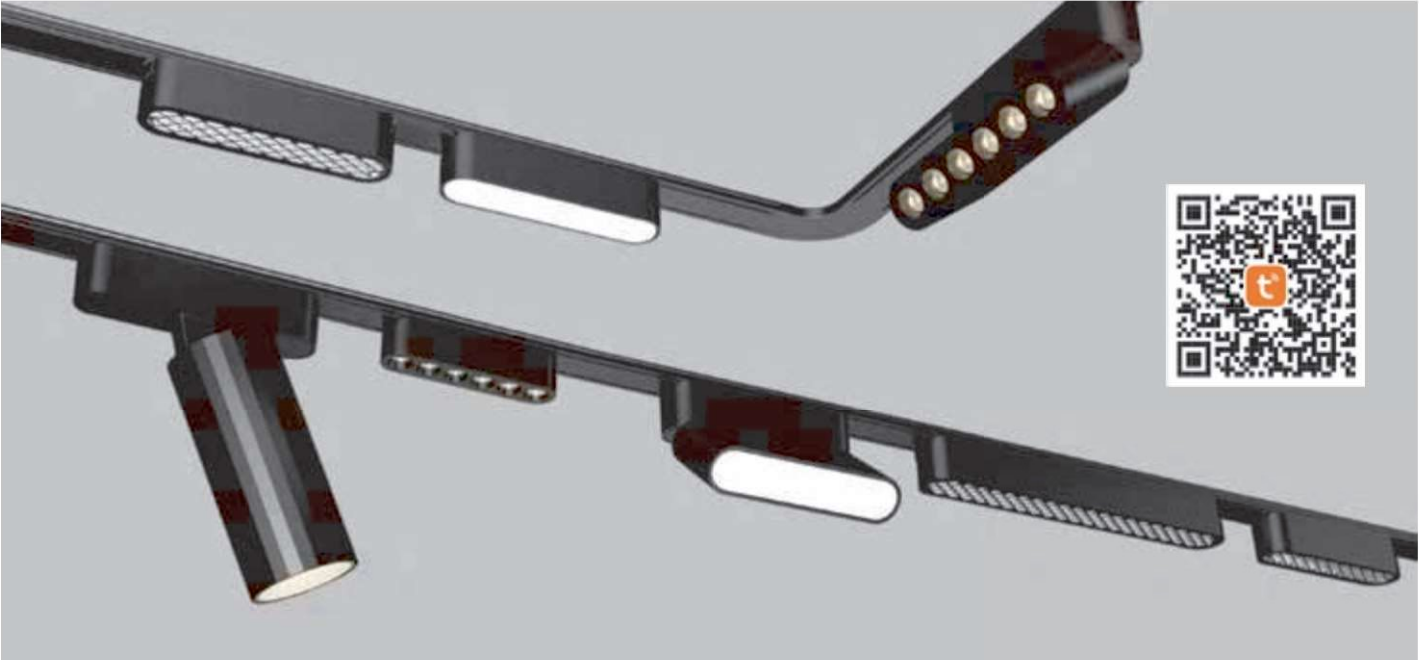

VK/04488

Product Models

Code	Model	Color	Power	Voltage	Dimensions	Thickness	Box
71164-029115	VK/04488/100/B/MOD	■ Black	100W	40V	23.9x2.5cm	2.5cm	50pcs
71164-030115	VK/04488/100/W/MOD	□ White	100W	40V	23.9x2.5cm	2.5cm	50pcs
71164-035115	VK/04488/200/B/MOD	■ Black	200W	40V	25.9x2.5cm	2.5cm	50pcs
71164-036115	VK/04488/200/W/MOD	□ White	200W	40V	25.9x2.5cm	2.5cm	50pcs

Details

Driver for Magnetic surface mounted track line 40V. IP Rating IP20. Working temperature <45°C. Material Aluminum.

operation only with

 WiFi

 Android


 iOS

 zigbee

 t



VK/04488/200/.../MOD



VK/04488/100/.../MOD

